


Technical Data



BR3DGY01-DL-HTEMP Daylight **High Temperature** **High Temperature** 3D polymers

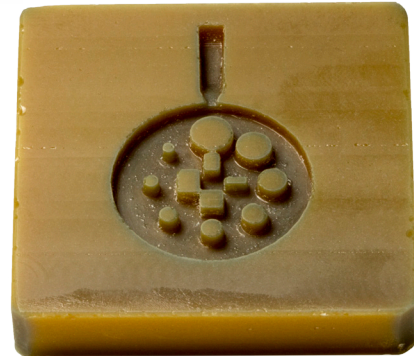

SPECS

FEATURES

Photocentric's range of High Temperature daylight polymers are ideal for making objects that need to survive temperatures above 100 °C. They have been designed with a HDT of 200 °C and have been proven suitable for injection moulding purposes. They exhibit very high tensile shear properties and almost no elongation. Daylight High Temperature provides excellent imaging in Liquid Crystal printers. You will experience the benefits of fast exposure times and a wide exposure latitude, allowing you to hold the finest details your machine can provide. The solid material is tough, durable and long lasting provided it is stored in dry conditions away from UV light.

PROCESSING INSTRUCTIONS

Follow the procedures laid out in your 3D Liquid Crystal's user manual. Polymer should be poured into the tray away from direct sunlight. Polymer can be reused but should be poured through a filter to remove solid lumps. Keep hood on at all times. Liquid polymer is soluble in water and soap. After making cleaned objects surface tack can be removed by leaving under water in sunlight for 10 minutes.

DATA

Viscosity (At 25°C Brookfield spindle 3)	520 cPs
Hardness (After post exposure)	95 Shore D
Tensile strength ASTM D638 (After post exposure)	38 MPa
Tensile strength ASTM D638 (Before post exposure)	22 MPa
Tensile modulus ASTM D638 (After post exposure)	3560 MPa
Elongation at break ASTM D638	1.2%
Heat deflection temp ASTM D648	200°C
Storage	10<t>50°C
Density	1.17 g/cm ³

AVAILABLE COLOURS

Amber

Available in 1kg bottles.